


Siemens M55

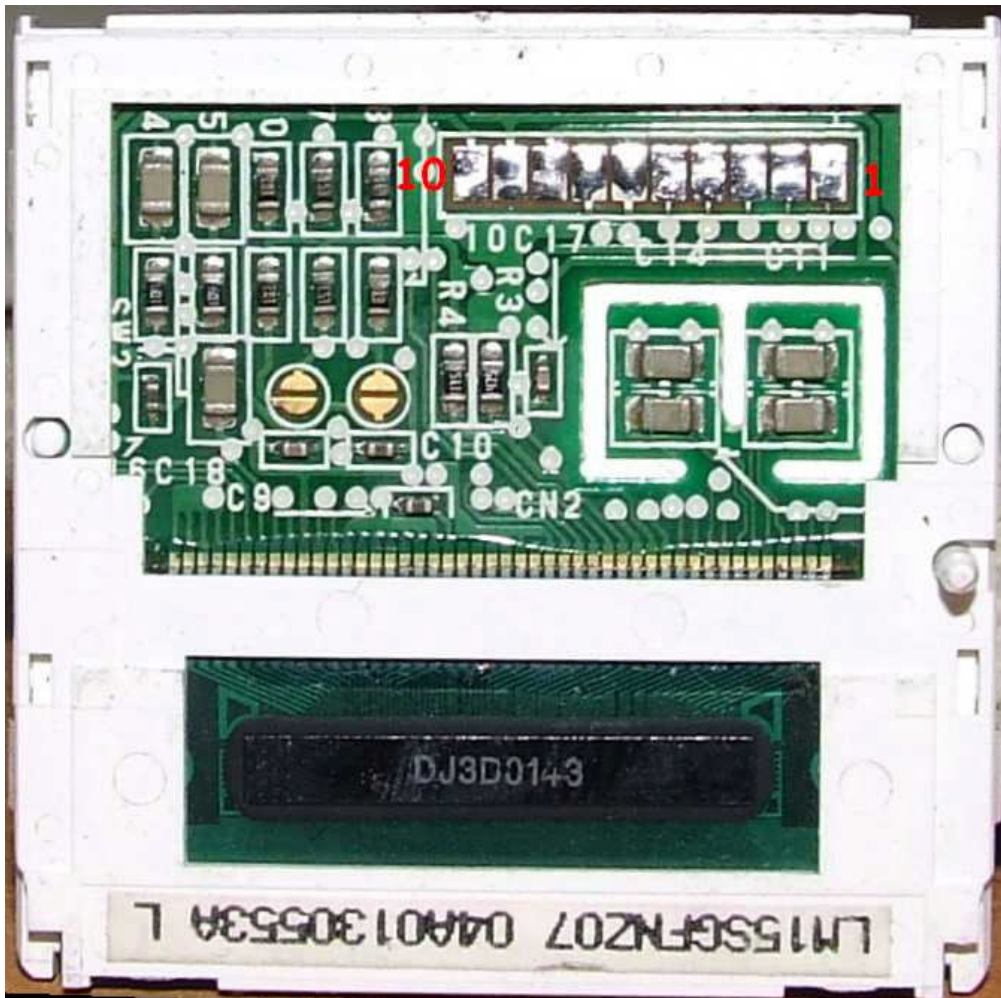

Siemens M55 LCD Module

Lcd chip: my guess Samsung S6B33A2 / HM17CM4101 - for commands see HM17CM4096 datasheet

Resolution: 101x80 4096 colors

Technology: CSTN

ID: 34

Pin1 Cs
Pin2 Reset
Pin3 Rs
Pin4 Sclk
Pin5 Sdata
Pin6 +2.9V
Pin7 Gnd
Pin8 Led1 A
Pin9 Led1+Led2 K
Pin10 Led2 A