


1/ Both vehicles:

- a. engines off
- b. handbrakes applied
- c. gear in neutral
- d. open hoods
- e. locate battery terminals

2/ Connect cables:

- a. red cable to bad battery [+] first, then good battery [+]
- b. black cable to good battery [-] first, then bad battery [-]

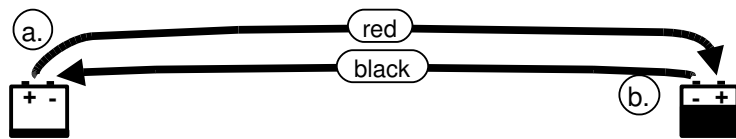

3/ start the engine of the good vehicle

4/ Attempt to start the engine of the bad vehicle

- turn over for not more than 5 seconds, maximum 3 times
- rest for 1 minute and attempt again if it fails to start (5 tries)

5/ Carefully disconnect cables (one at a time),

- close hoods, repack cables and instruction sheet,
- thank the person who helped you

6/ Drive for 20 km / 12 miles